


A-Pillar Moulding LH

Removal

NOTE:

This procedure is also applicable for the RH moulding.

- 1 . Open the bonnet. Remove the A-pillar moulding.
▶ Release and discard the 5 clips.

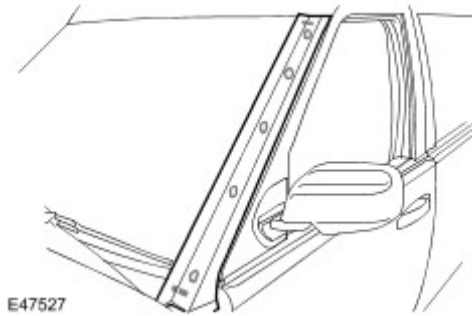

Installation

1 . **NOTE:**

The lower clip is unique to the others and must only be installed to the lowest position on the moulding.

To install, reverse the removal procedure.

- 1) New clips must be used.