Range Rover Discovery Interface Installation/Connection Manual

Model: Discovery3 and Range Rover Sport 05s'~ ONLY



*** Parts *** 1)VIDEO INTERFACE



2) Power Cable



3) RGB IN cable



4) GVIF signal cable



5)Audio Select Cable (NO USE unless special occasion)

*** The picture of completion ***



Safety Advices Before Installation

Caution:

Installation requires special knowledge and should be done by trained personnel.

Please read these instructions carefully before you start your work!

Even twice ore more times, if needed.

Please work with caution and patience.

Use suitable and recommended tools only and handle all parts with special attention.

Follow to the regulations concerning the vehicle's electric system.

Remove the ignition key before you start the installation!


Take care that no electric consumers are still switched on!

The car's electric system must be in a state of quiescent current!

Installation may only be done during idle status.

Thereby please pay attention to the car's manufacturer requirements.

This interface is to be used in cars with 12V negative ground only!

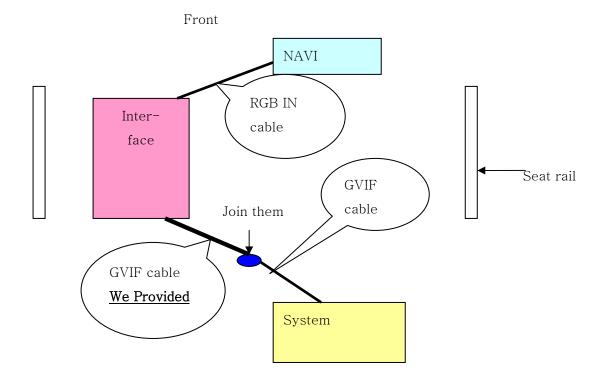


Back

GVIF cable is located under the front seat.

Cut the original GVIF cable, and join with the cable to GVIF cable that we provided. Use RGB IN cable to connect RGB wires in a NAVI.

Installing: in case of Having original NAVI

Front

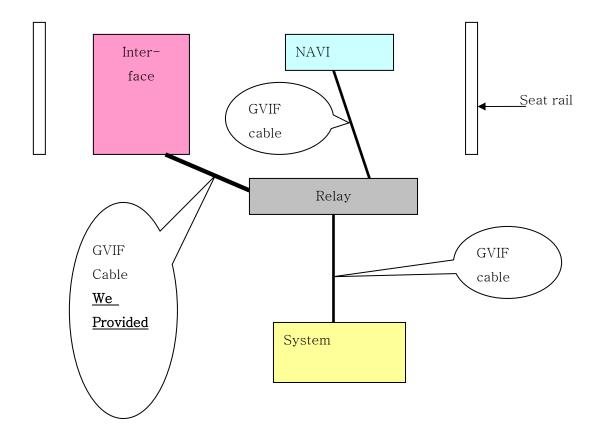

Back

GVIF cable is located under the front seat.

In this case, you have to use a relay.