


ALL-NEW DISCOVERY

MOBILE PHONE WIRELESS CHARGER

VPLRV0118

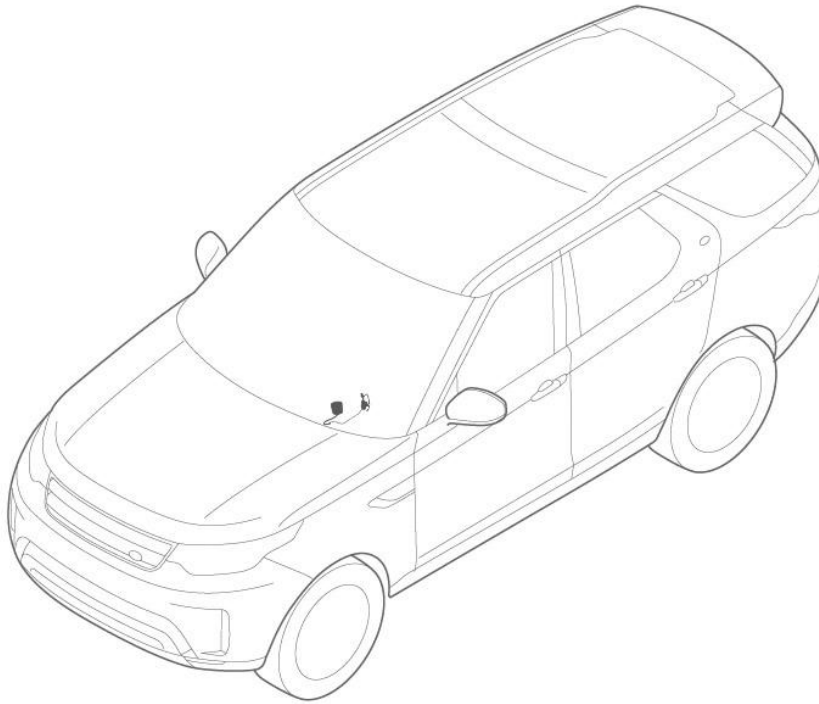







E196599

WARNING

- Accessories which are not properly fitted can be dangerous. Read the instructions carefully prior to fitting. Whilst fitting, comply with instructions at all times. If in doubt, contact your nearest approved retailer.

NOTE

- Left hand drive illustrations shown, Right hand drive is similar.

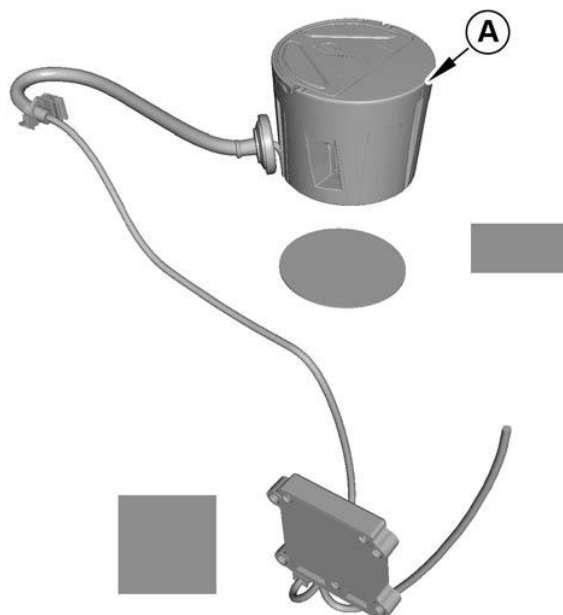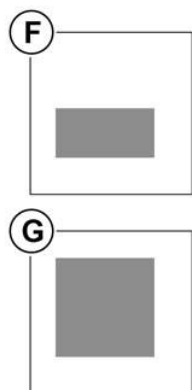

E196588


REMOVAL INSTRUCTIONS

1

Remove the floor console upper section. For additional information, please refer to the official Workshop Manual. Floor Console Upper Section (501-12)


Fitting Instruction

1

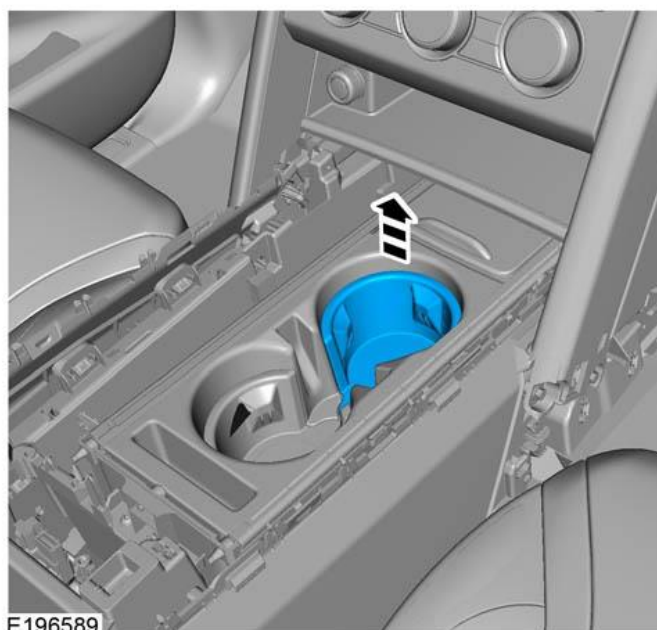

E196589


Remove the cup holder insert.

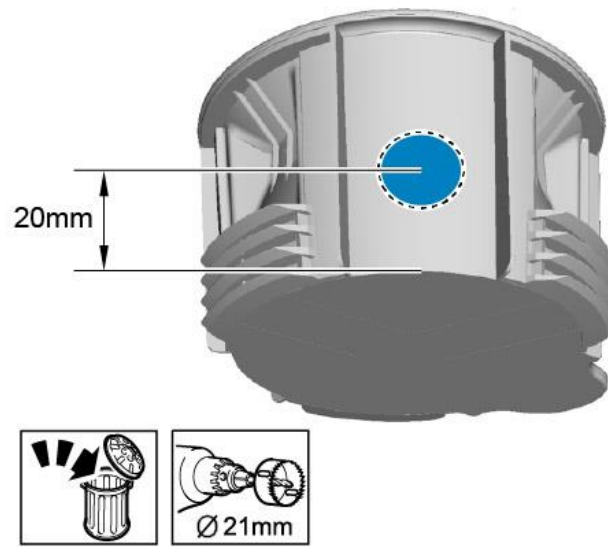

E202062

NOTE


- Make sure that the mating faces are clean and free of foreign material.
- Drill a 21mm hole in the position as illustrated.

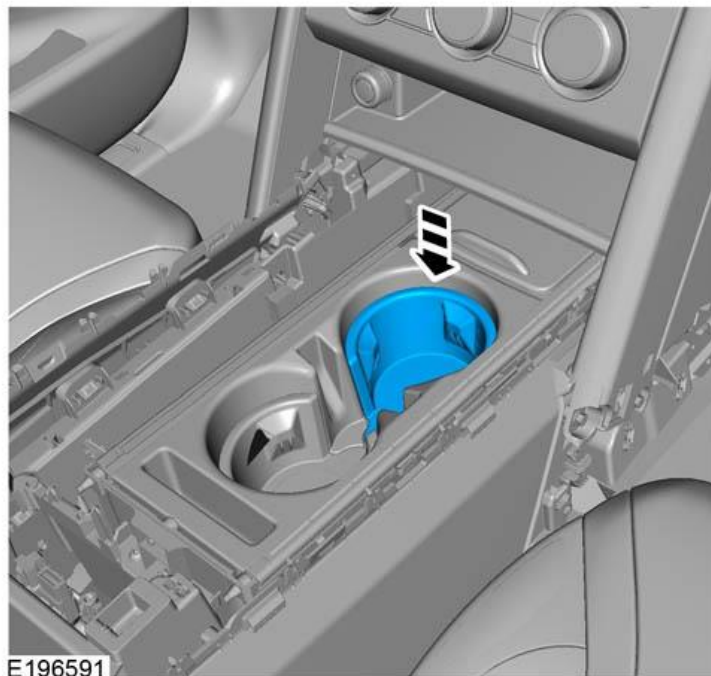

E196591


Install the cup holder insert.

4

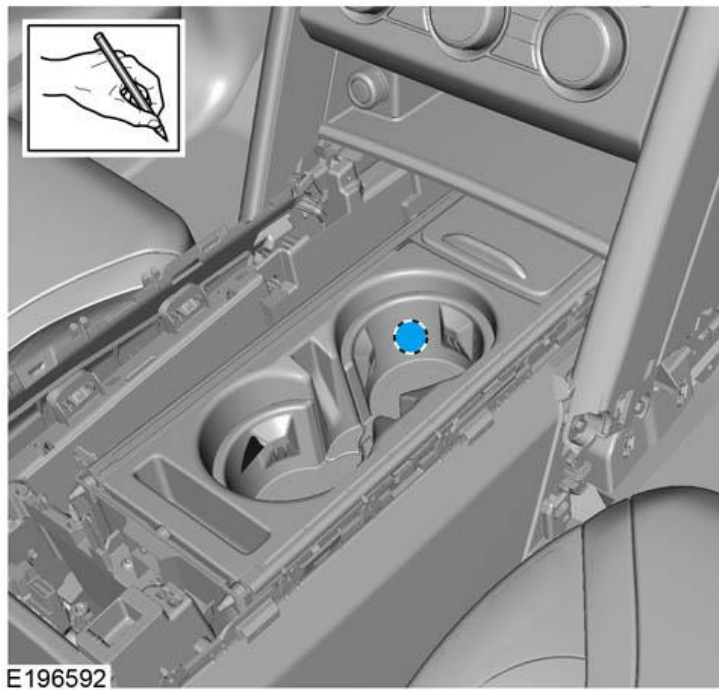


Mark the 21mm hole on the cup holder as illustrated.

5

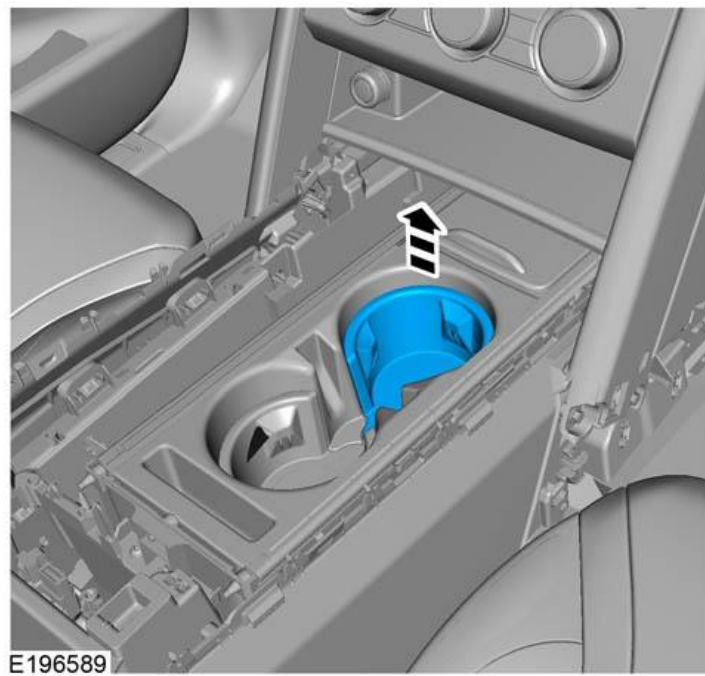

Remove the cup holder insert.

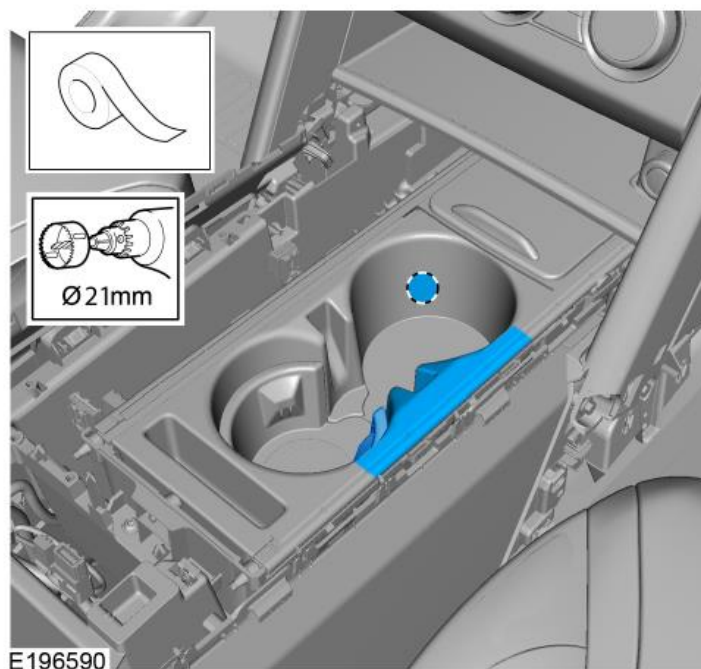


CAUTION

- Protect the surrounding trim.

NOTE


- Make sure that the mating faces are clean and free of foreign material.

Drill a 21mm hole in the position as illustrated.

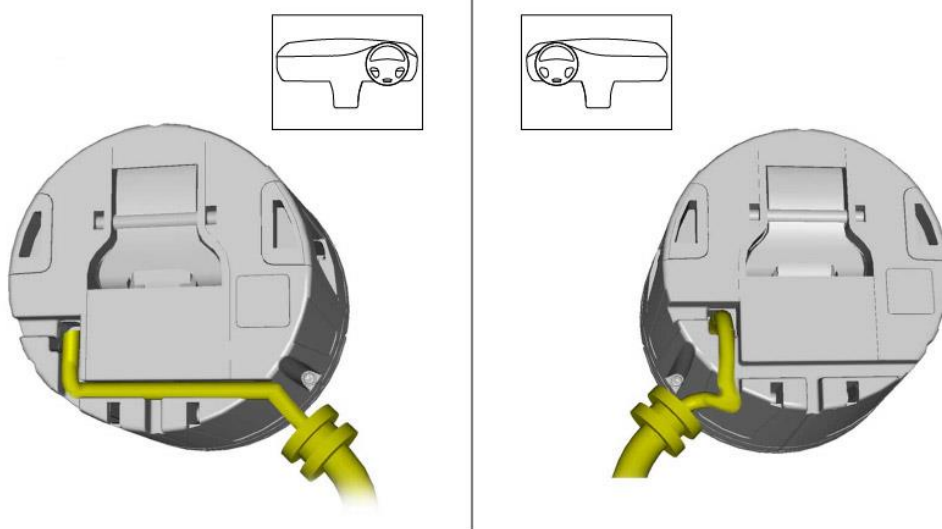


E198494

Make sure that the harness is in the correct channel on the bottom of the docking station.

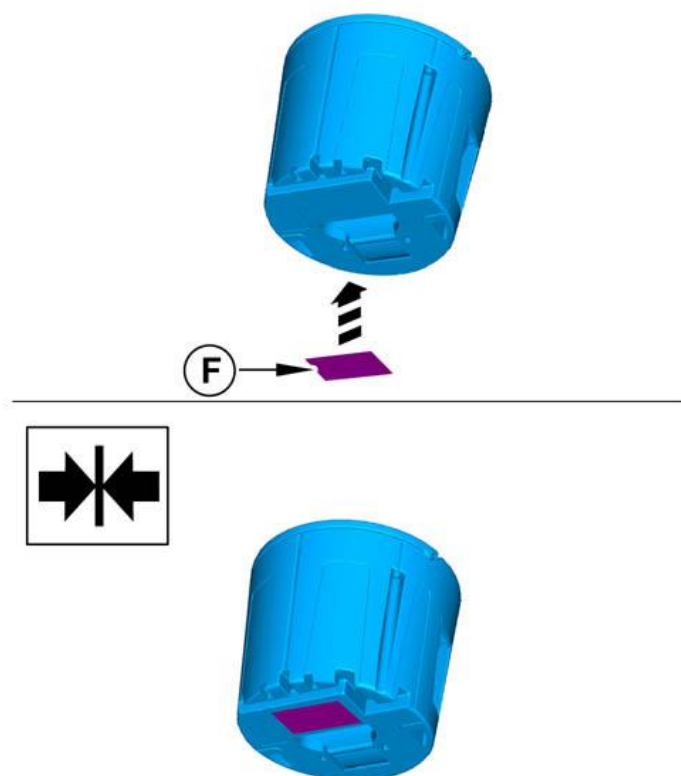




E196859

Install the tape onto the docking station.

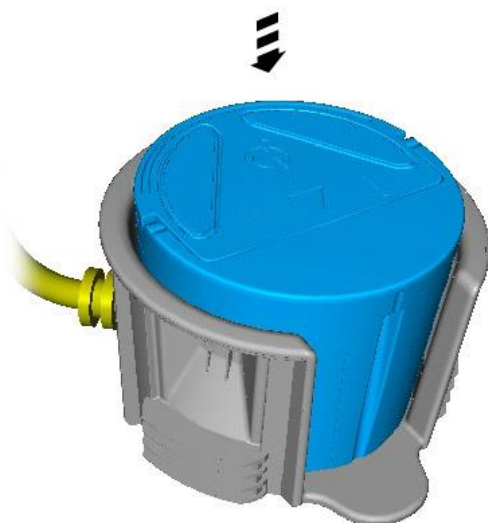


E196594

Install the docking station to the cup holder insert.

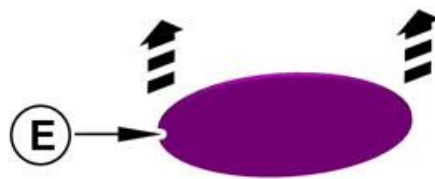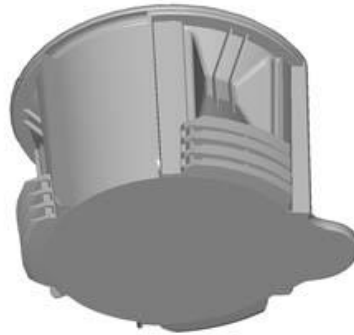

E196860


Install the tape onto the cup holder insert.

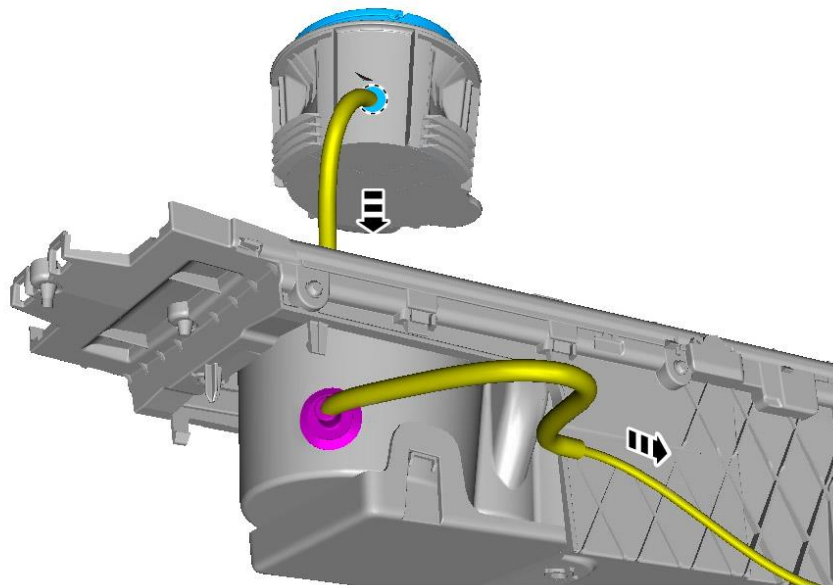

E196858


CAUTION

- Make sure that the wiring harness does not accumulate under the cup holder insert as it is installed.
- Install the cup holder insert to the cup holder.
- Pull the harness through the insert and the center console.

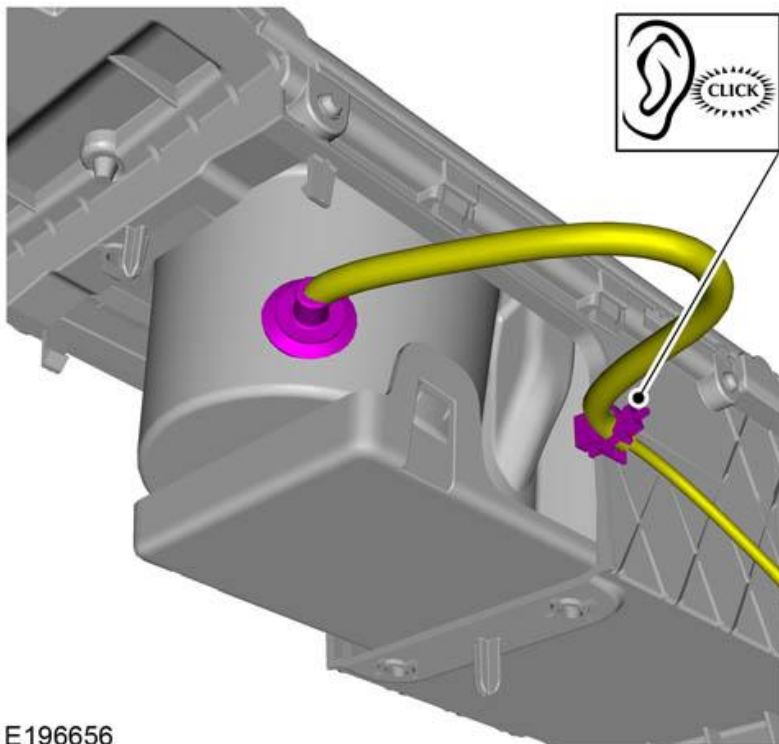


E196656

Secure the docking station wiring harness to the cup holder.

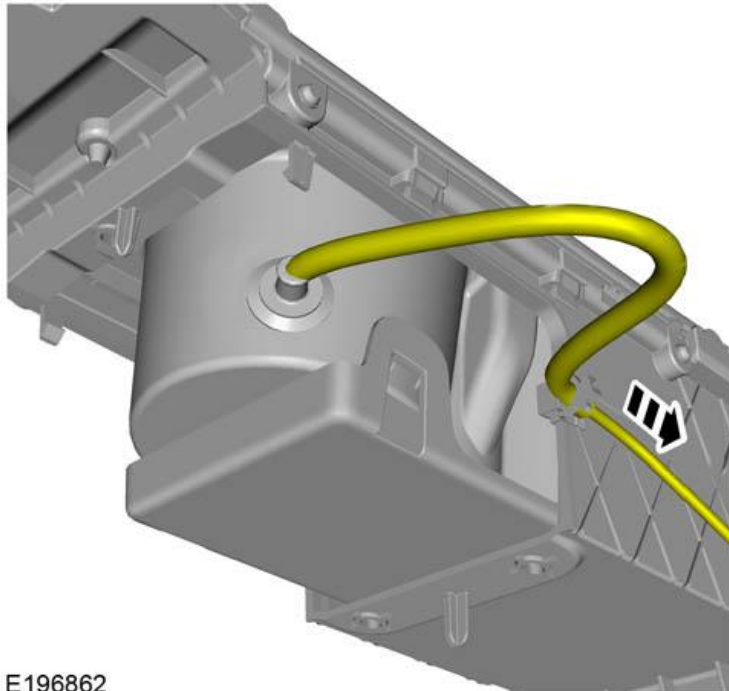


E196862

Feed any excess wiring harness through the retaining clip where possible.

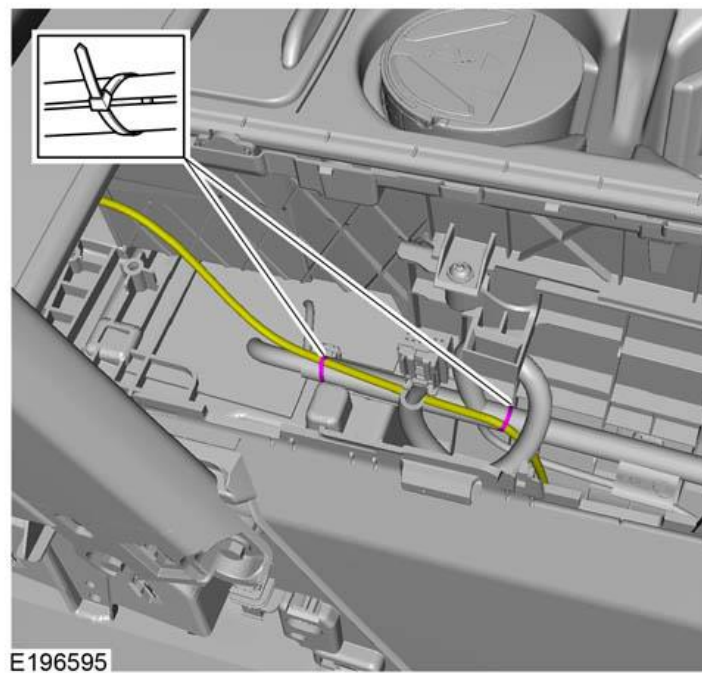


Secure the docking station wiring harness to the floor console main harness as illustrated.

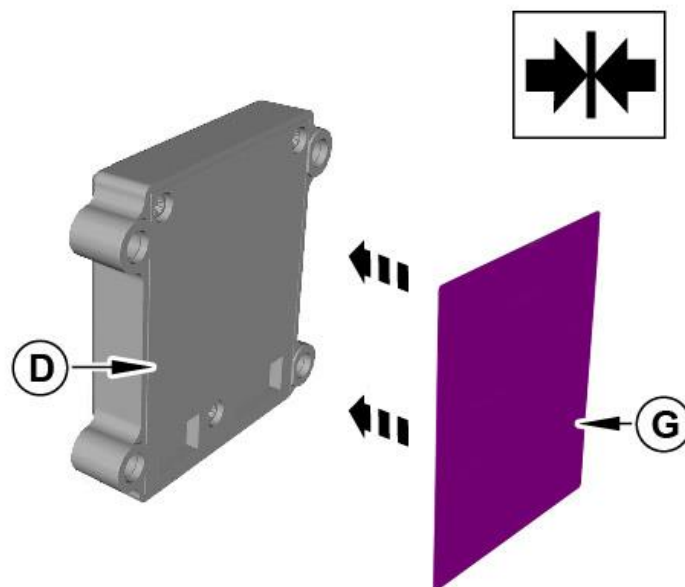


E196861

Install the tape onto the docking station module.

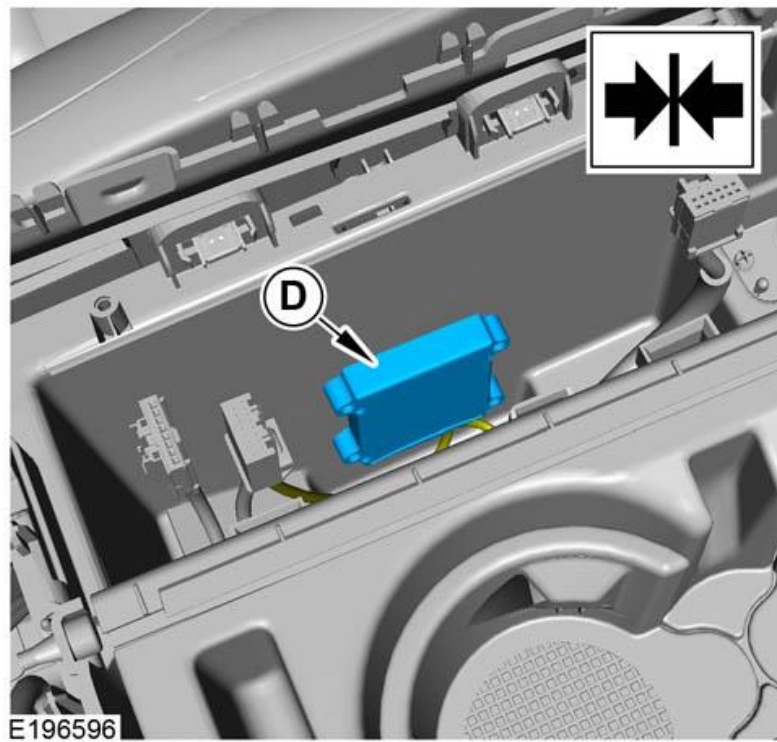


Install the docking station module.

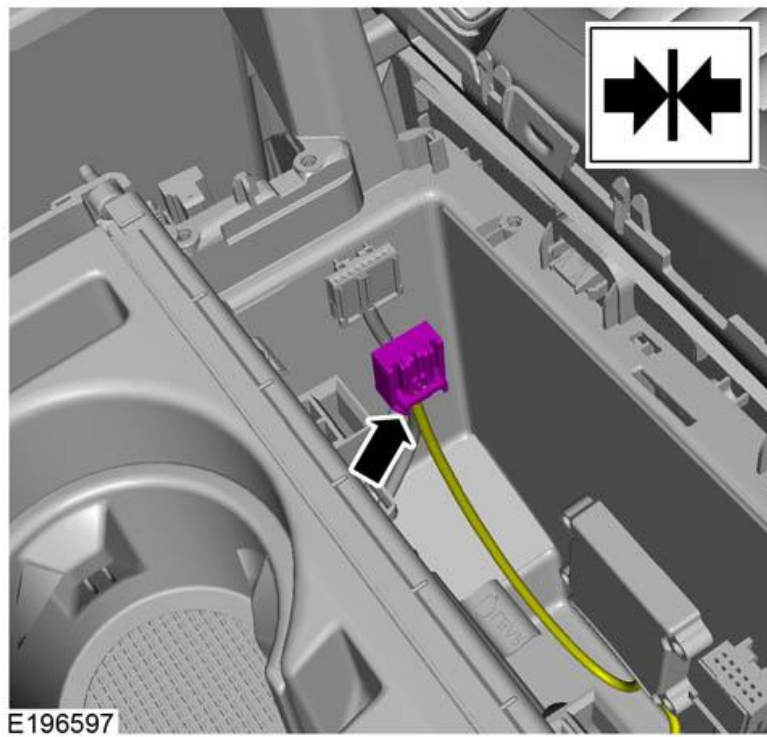

Connect the docking station harness into the main harness connector. Apply suitable foam tape to the T piece connector.

Install the floor console upper section. For additional information, please refer to the official Workshop Manual. Floor Console Upper Section (501-12)

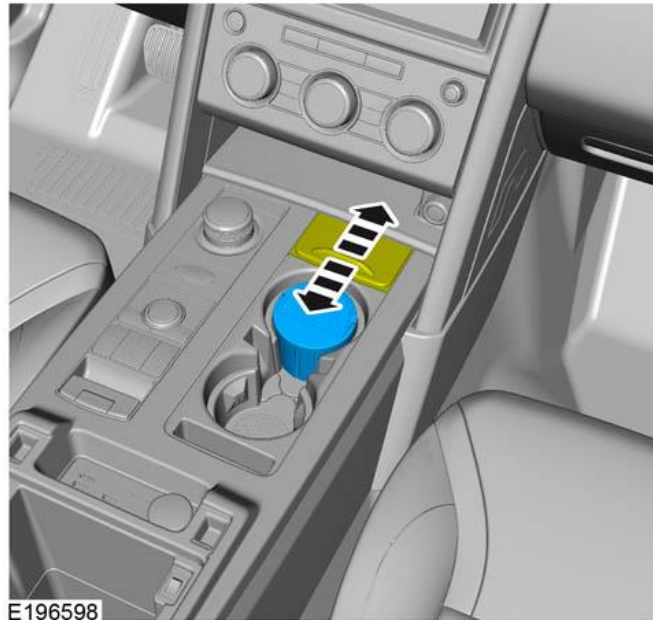

E196598

NOTE

- Wireless charger will only operate when all doors and tailgate are closed and engine is running. Check the operation of the docking station.

© Land Rover 2016